


DULA 4 Fully automatic machine to lacquer step indexes



The DULA 4 lacquers step indexes in bound and unbound products with a UV-Lacquer.

Operating process

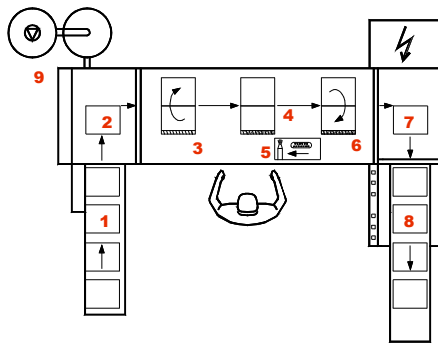

- 1 Books in pile
- 2 Feeding
- 3 Opening
- 4 Lacquering/drying
- 5 UV-Lacquer- and drying station
- 6 Closing
- 7 Delivery
- 8 Books shingled
- 9 Suction and filter equipment for UV-lacquer

The DULA 4 lacquers in a closed processing area. The operating person is not exposed to the UV-lacquer and UV-light.

Products	pocket diaries, agendas, address books, school books, catalogues, price lists, promotional brochures, documentation, loose sheets etc.
Formats	max. 320 x 250 mm min. 50 x 50 mm
Book thickness	max. 20 mm min. 2 mm
Binding category	all standard binding sorts
UV-lacquer	clear or coloured lacquer
Lacquer	1 kg is sufficient for 4'000 – 10'000 products (depending on format, cutting width and lacquer coating)
Consumption	UV-lamp approx. 1000 working hours filter set approx. 500 working hours
Life expectancy	hard and soft cover
Cover	
Operator	50 – 100 % manpower (depending on product)
Output	max. 800 pieces/h
Change-over time	15 – 60 minutes (to change product and lacquer)
Technical data	dimensions 3600 x 2900 x 1700 mm (L x W x H) weight ca. 1600 kg

Interesting Features

- The coating of UV-lacquer is only 30 to 40 microns
- Individually chosen lacquer colour to the product
- The air quality in the production area is ensured by the suction and filter equipments
- Processing of products with soft and hard covers
- 3 years guarantee

